MAGICARD
secure ID card printers

Tempo

QUALITY DESIGN MADE SIMPLE

Simply the best value for color ID card printing

A quality dye-sublimation ID card printer at a great price.

HoloKote card watermark printed using standard consumables at no extra cost.

Incredibly easy to use with drop-in dye-film ribbon and hand-fed card loading.

Compact and light (only 8” each side and 7 lbs).

Edge-to-edge full color printing
High quality image, printed to the edge of the card.

Mag stripe encoding
Tempo M includes built-in magnetic stripe card encoder.

option

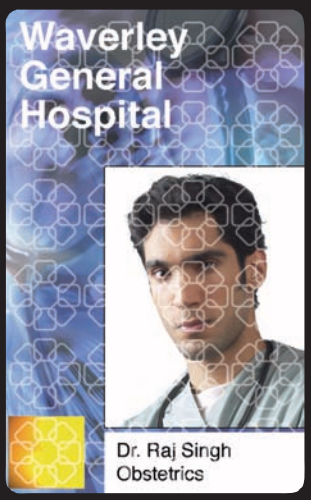

Card security
Holokote is an anti-copying watermark across the entire card surface, that becomes visible when the card is viewed at an angle. With the Tempo, the design shown is printed.

HoloPatch™ adds daylight visible security to every card.

option

Print on your choice of card
The Tempo will print on all quality PVC cards, whether blank or pre-printed.

Ultra ELECTRONICS

when security really matters

Consumables

Drop in ribbon
Simple drop-in dye-film ribbon comes in 250 image color or 500 image monochrome types.

Card packs available include plain, magnetic stripe and HoloPatch cards.

MAGICARD Tempo

Specifications

Tempo Color ID Card Printer (Part No. M9006-907)

Print Speed	Prints a full color edge-to-edge image in 40 seconds, and a monochrome image in 6 seconds.
Built-in copy protection	Standard HoloKote™ anti-copying watermark across entire face of card. When used with HoloPatch™ cards one area of the HoloKote® watermark is highlighted as a high visibility security seal.
Warranty	12 months limited warranty.
Data Interface to PC	USB rev1.1 (USB 2.0 compatible).
Software drivers	Windows 2000, XP (all supplied with printer).
Printhead	Field replaceable.
Consumables	250 image YMCKO colour ribbon. (Part No. TM1). 500 image K only black resin film. (Part No. PF3). Magicard 500 plain white PVC cards. (M9006-793). Magicard 500 HoloPatch white PVC cards. (M9006-796).
Power Source	External power supply 90-265V 47-63Hz autoranging.
Dimensions	6.9” wide x 7.8” high x 8.3” deep.
Weight	7lbs approx.
Color	Metallic Silver/Blue.
Operating environment	Sheltered Office environment 50°F to 85°F.
Safety	CE certified, UL listed.
EMC	EN50 081-1 and EN 50 082-1 (Europe) FCC pt15 curve A (USA) and CSA 08.8 curve A (Canada).

Tempo M with Built-in HiCo Magnetic Stripe Card Encoder (Part No. M9006-908).

Print speed	Print speed : 45 seconds including encoding of tracks 1 and 2 of the magnetic stripe.
Consumables	Magicard 500 HiCo Mag Stripe white PVC cards. (M9006-794). Magicard 500 HoloPatch HiCo Mag Stripe white PVC cards. (M9006-797).
Mag Encoding	ISO Std 7811 compatible HiCo encoder for tracks 1 and 2.
Dimensions	6.9” x 7.8” x 10.3” including return plate.

Magicard Tempo, HoloPatch and HoloKote are trademarks of Ultra Electronics Limited. Windows ‘98 ME, NT4, 2000 and XP are trademarks of Microsoft Corporation.The information contained in this document reflects the current state of design and we reserve the right to change the specification without notice or obligation.

Ultra ELECTRONICS

ISO 9001 Accredited

www.ultramagicard.com